


iLift.ie Goods Lift

Goods lift with trained operative, Load capacity up to 2,000 kg

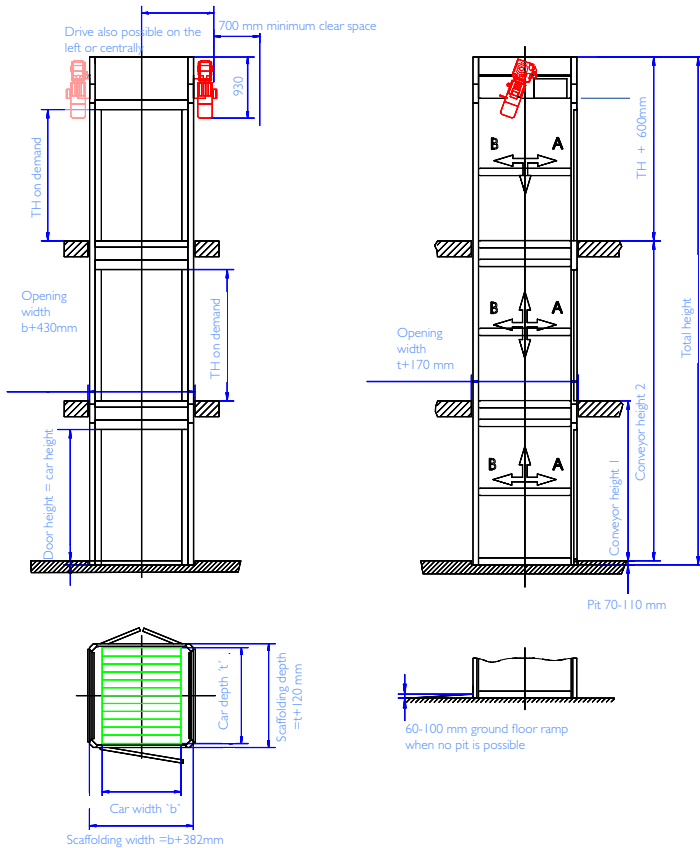

ConVer® ConVer goods elevator with instructed support person - type I47.02

The model ConVer® I47 is a special version of the ConVer® I46. It permits accompanying the load by an instructed support person. This saves time and unnecessary paths. Operation in the car takes place as "deadman control" via a cabin table with a key switch that deactivates outside control. From the outside, the ConVer® I47 is controlled by a collection and dispatch control like type I46.

The ConVer® I47 is EC type-tested according to the machinery directive 2006/42/EC Annex VI, by the TÜV Munich and the current type test certificate EC-MRL 009. It is equipped with a high degree of safety components. In particular customer-side safety provisions like emergency call systems can be integrated.

ConVer® goods elevator with instructed support person, load capacity up to 2.000 kg - type I47.02

Operating speed: up to 0.15 m/s.	Fire protection: The shaft doors are produced pursuant to DIN 18090.
Conveying height: up to 20.000 mm.	Safety: The ConVer® I47 is equipped with a high level of safety components. In particular customer-side safety provisions can be considered.
Car dimensions: Width of 1200 mm to 2400 mm Depth of 1060 mm to 2860 mm Height of 2000 mm to 2800 mm (special sizes on request)	Control: Standard goods elevators are available for 2 to 6 stops with up to 12 accesses. The ConVer® I47 is operated from the outside with a call and dispatch control. The car has a cabin table with a key switch that deactivates outside control. Internal operation is by a "deadman control".
Shaft doors: In single- or two-wing mechanic turnstile design. (special option on request)	Assembly: Stable, free-standing framework construction. Depending on load capacity, only a pit of 70 to 110 mm or a ground floor ramp of 60-100 mm is required. Setup without cutting and welding work.
Drive: The drive is installed on top, either on the right or left outer side; central drive in the shaft-head is possible as well.	Load capacity: 1200 kg with overload protection.
Lighting: The ConVer® type I47 can have an energy-saving LED car lighting installed.	Colors: RAL colors serially powder-coated.

Independent Lift Company Limited
D13 M4 Interchange Business Park
Maynooth Road, Celbridge, Co Kildare

Tel: 01 6270006 Email: info@iLift.ie Web: www.iLift.ie